


plate on side of housing, turn eccentric adjusting load, turn up adjusting screw just enough to elimi-

incidental  
 er, 6 lobe  
 Vacuum  
 or adjust-  
 adjustable  
 k plugs in  
 (fixed set)  
 left bank.  
 2 1/2 degree  
 ree engine  
 en banks)  
 (timing).  
 djusted by  
 ; adjusting  
 ; adjust. Ac-  
 after plates  
 '014-.016"  
 ge Set and  
 os.  
 open. Each  
 ces.  
 . Capacity  
 (tive)  
 ne R.P.M.  
 400  
 600  
 750  
 960  
 1440  
 1900  
 To remove,  
 pscrews in  
 c. below.  
 on Position  
 58" BTDC.  
 nchronized  
 V-126 must  
 ommands  
 ization and  
 for use on

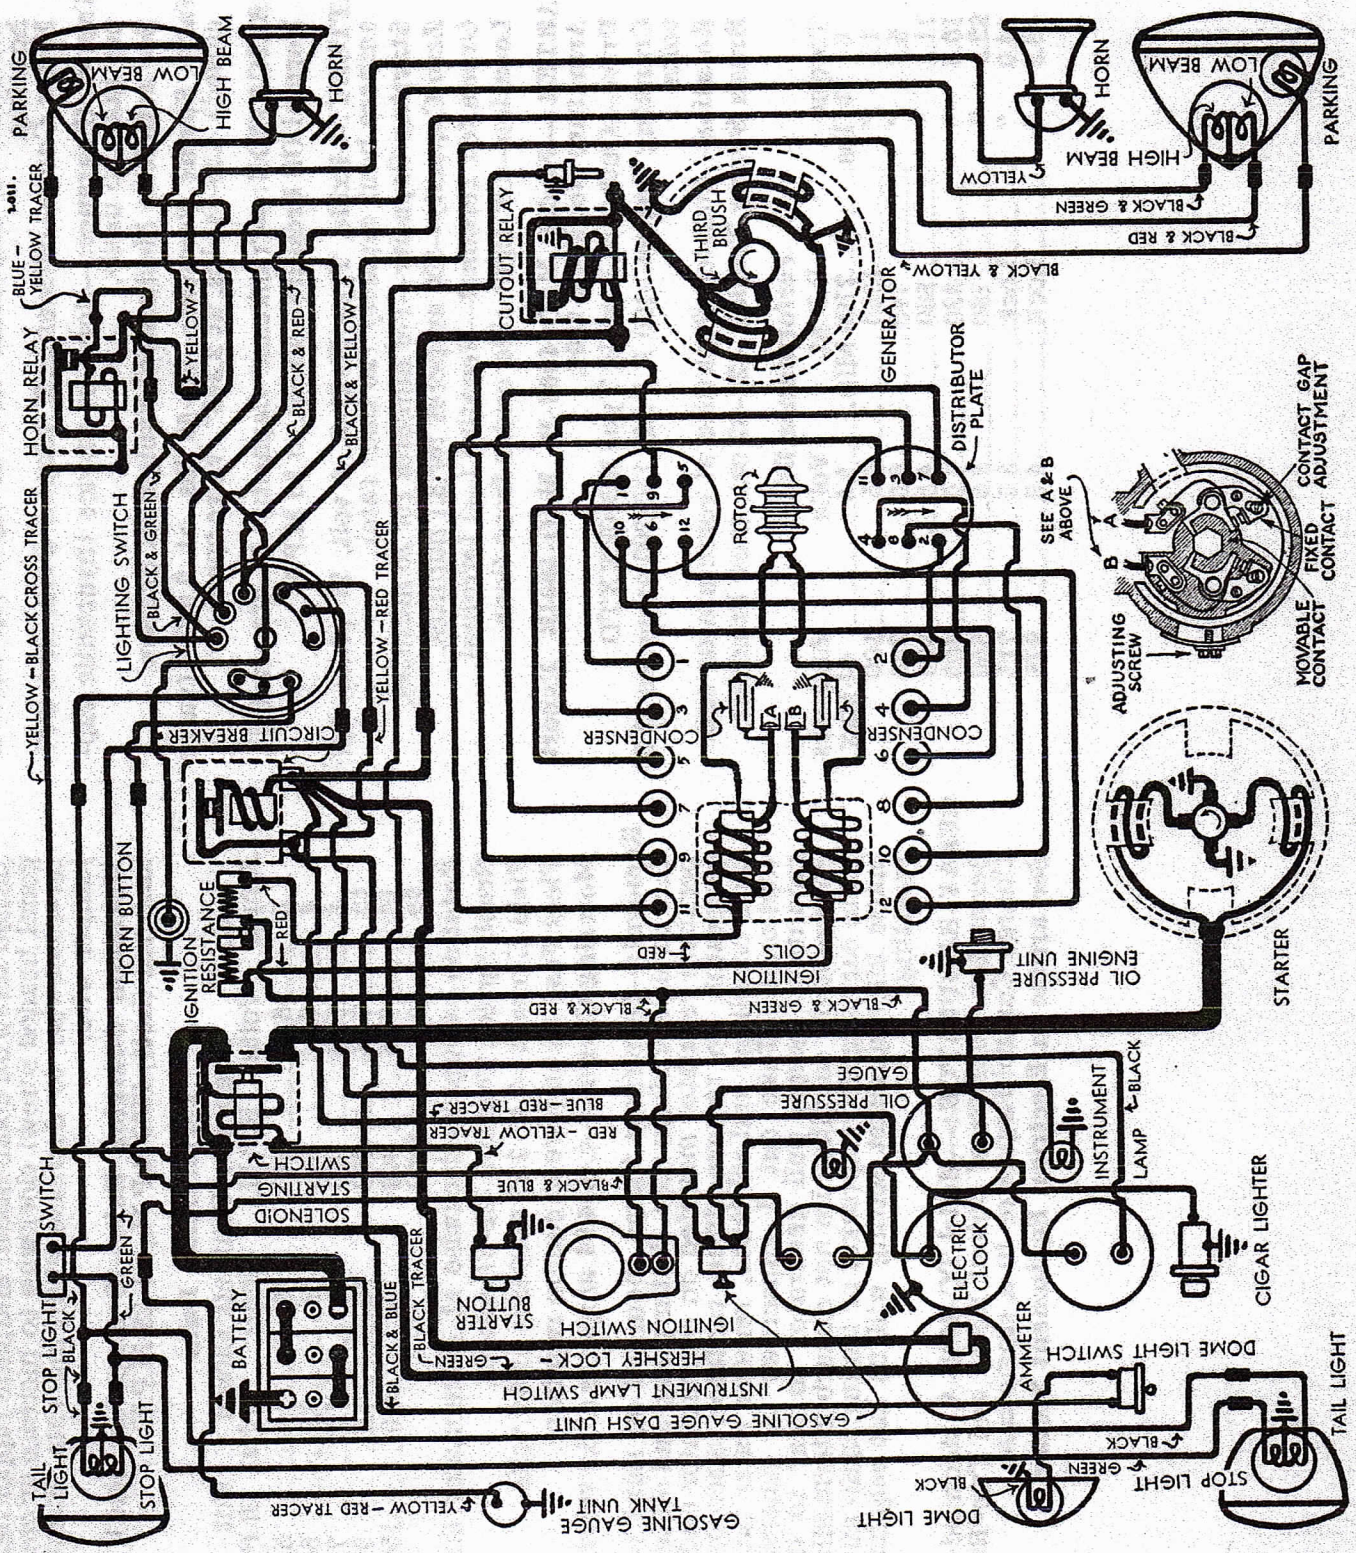

1536